

# NEW **SUPER CARRY** WITH **SUPERPOWER!**

**INDIA'S MOST POWERFUL  
MINI TRUCK\***



**SUPER POWERFUL ENGINE  
WITH SUPER PERFORMANCE**



**SUPER HANDLING & STABILITY**



**SUPER COMFORT**



**SUPER SAFETY WITH ENGINE IMMOBILIZER  
AND 18+ SAFETY FEATURES**

**CNG + PETROL**  
CNG + 5L EMERGENCY PETROL TANK

**SUPER MILEAGE**


**NEW  
SUPER CARRY**



# TECHNICAL SPECIFICATIONS

MODEL VARIANTS		PETROL	PETROL CHASSIS* (Incompletely built vehicle)	CNG	CNG CHASSIS* (Incompletely built vehicle)
Specifications	Engine	Advanced K-Series Dual Jet, Dual VVT	Advanced K-Series Dual Jet, Dual VVT	Advanced K-Series Dual Jet, Dual VVT	Advanced K-Series Dual Jet, Dual VVT
	Maximum Power	59.4kW (80.7PS) @6000 rpm	59.4kW (80.7PS) @6000 rpm	52.7kW (71.6PS) @6000 rpm	52.7kW (71.6PS) @6000 rpm
	Maximum Torque	104.4 Nm@2900 rpm	104.4 Nm@2900 rpm	95 Nm@2800 rpm	95 Nm@2800 rpm
	Engine Capacity	1197 cc	1197 cc	1197 cc	1197 cc
	Fuel Distribution	MPFI	MPFI	MPFI	MPFI
Transmission	Type	5MT	5MT	5MT	5MT
	Gearbox	5 Forward and 1 Reverse	5 Forward and 1 Reverse	5 Forward and 1 Reverse	5 Forward and 1 Reverse
	Clutch	Single Plate Dry Friction	Single Plate Dry Friction	Single Plate Dry Friction	Single Plate Dry Friction
Brake	Brake Control Valve	LSPV	LSPV	LSPV	LSPV
	Front	Ventilated Disc Brake	Ventilated Disc Brake	Ventilated Disc Brake	Ventilated Disc Brake
	Rear	Drum Brake	Drum Brake	Drum Brake	Drum Brake
Suspension & Steering	Front	MacPherson Strut with Coil Spring	MacPherson Strut with Coil Spring	MacPherson Strut with Coil Spring	MacPherson Strut with Coil Spring
	Rear	Leaf Spring Rigid Axle	Leaf Spring Rigid Axle	Leaf Spring Rigid Axle	Leaf Spring Rigid Axle
	Steering	Manual-Rack and Pinion	Manual-Rack and Pinion	Manual-Rack and Pinion	Manual-Rack and Pinion
Wheel and Tyre	Tyre	155R13 LT 8PR	155R13 LT 8PR	155R13 LT 8PR	155R13 LT 8PR
	Length	3800 mm	3800 mm	3800 mm	3800 mm
Measurement	Width	1562 mm	1562 mm	1562 mm	1562 mm
	Height	1883 mm	1883 mm	1883 mm	1883 mm
	Wheel Base	2110 mm	2110 mm	2110 mm	2110 mm
	Front Track	1345 mm	1345 mm	1345 mm	1345 mm
	Rear Track	1330 mm	1330 mm	1330 mm	1330 mm
	Length of Deck	2183 mm	NA	2183 mm	NA
	Width of Deck	1488 mm	NA	1488 mm	NA
	Height of Deck	300 mm	NA	300 mm	NA
	Turning Radius	4.3 m	4.3 m	4.3 m	4.3 m
	Performance	Top Speed	80 Km/h	80 Km/h	80 Km/h
Gradeability		34%	34%	34%	34%
Weight	GVW	1600 Kg	1600 Kg	1600 Kg	1600 Kg
	Kerb	860 Kg	765 Kg	975 Kg	880 Kg
	Payload	740 Kg	NA	625 Kg	NA
Capacity	Seating Capacity	Driver + 1	Driver + 1	Driver + 1	Driver + 1
	Fuel Tank	30 L	30 L	CNG Cylinder (Water Equivalent) = 70L (35L x 2) Gasoline = 5L (For Emergency Use)	CNG Cylinder (Water Equivalent) = 70L (35L x 2) Gasoline = 5L (For Emergency Use)

EQUIPMENT LIST	VARIANT	PETROL	PETROL CHASSIS* (Incompletely built vehicle)	CNG	CNG CHASSIS* (Incompletely built vehicle)
Exterior	Tailgate Opening Function with Handle	S		S	
	Tailgate Chain	S		S	
	Front Wiper (2-Speed) with Windshield Washer	S	S	S	S
	ORVM (Driver and Co-Driver)	S	S	S	S
	Spare Tyre	S	S	S	S
	Rope Hooks	S		S	
	Mud Flap (Front)	S	S	S	S
	Rear Fender	S		S	
	Front Body Graphics			S	S
	Side Body Graphics			S	S
Interior (Comfort, Convenience & Utility)	Cabin Main Light (2-Position)	S	S	S	S
	Driver Side Sun Visor	S	S	S	S
	Driver Side Pocket	S	S	S	S
	Sliding Back Window	S	S	S	S
	Assist Grip (Driver & Co-Driver)	S	S	S	S
	Bottle Holder	S	S	S	S
	Instrument Panel Upper Tray (2 Numbers)	S	S	S	S
	12V Accessory Socket	S	S	S	S
	Floor Carpet	S	S	S	S
	3-Spoke Steering Wheel	S	S	S	S
^Safety Features	Sliding Driver Seat	S	S	S	S
	Seat Belts (Retractable)	S	S	S	S
	Locking Glove Box (With Key)	S	S	S	S
	Headlamp Levelling	S	S	S	S
	Steering Lock	S	S	S	S
	Reflective Tape (Front)	S	S	S	S
	Reflective Tape (Rear)	S	S	S	S
	Reflector Front (White)	S	S	S	S
	Reflector Rear (Red)	S	S	S	S
	First-Aid Kit	S	S	S	S
	Warning Triangle	S	S	S	S
	Hazard Lamp	S	S	S	S
	Front Disk Brake	S	S	S	S
	Brake LSPV	S	S	S	S
	Stepney Lock Provision	S	S	S	S
	Battery Lock Provision	S	S	S	S
	Fire Extinguisher	S	S	S	S
Rear Parking Sensor System	S	S	S	S	
Seat Belt Reminder (Driver & Co-Driver)	S	S	S	S	
Engine Immobilizer	S	S	S	S	

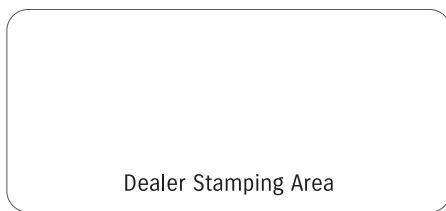

## Body Colour Options



Metallic Silky Silver



Solid White



Metallic Glistening Grey



**For more details contact | Toll free No: 1800 102 1800**

Visit us at: <https://www.marutisuzukicommercial.com/super-carry>

Maruti Suzuki India Limited, reserves the right to change without notice, prices, colours, equipments, specifications, variants and also to discontinue models. Accessories and features shown in the pictures may not be part of standard equipment, and will differ according to the variant. For variant-specific features, refer to the equipment list. Colours shown may vary from actual body colours due to printing on paper. Images used are for illustration purposes only.

\*Claim validated by JATO Dynamics on 27-Mar-2023. #For Cab Chassis variants, application body to be fabricated as per instructions in Owner's Manual. ^For details on functioning of safety features, kindly refer to the Owner's Manual.

MARUTI SUZUKI INDIA LTD., Plot No. 1, Nelson Mandela Road, Vasant Kunj, New Delhi - 110070, Tel. 011-46781000.